



integration with integrity

3707715 User's Manual

Component Name

Version 1.1

Copyrights

This document is copyrighted and all rights are reserved. It does not allow any non authorization in copied, photocopied, translated or reproduced to any electronic or machine readable form in whole or in part without prior written consent from the manufacturer.

In general, the manufacturer will not be liable for any direct, indirect, special, incidental or consequential damages arising from the use of inability to use the product or documentation, even if advised of the possibility of such damages. The manufacturer keeps the rights in the subject to change the contents of this document without prior notices in order to improve the function design, performance, quality and reliability. The author assumes no responsibility for any errors or omissions, which may appear in this document, nor does it make a commitment to update the information contained herein.

Trademarks

Intel is a registered trademark of Intel Corporation.

Award is a registered trademark of Award Software, Inc.

All other trademarks, products and or product's name mentioned herein are mentioned for identification purposes only, and may be trademarks and/or registered trademarks of their respective companies or owners.

Contents:

1.	Product Information.....	3
2.	System Features.....	3
3.	Specifications.....	4
4.	Pin Assignments.....	5
5.	Dimension.....	6
6.	DC Characters.....	9
7.	AC Characters.....	9
8.	Hardware Function.....	10
8.1.	Overlook.....	10
8.2.	Write Protect Switch.....	10
9.	Packing.....	11
9.1.	Product Package.....	11
9.2.	Product Photo.....	12

1. Product Information

The Micro Disk Serial ATA Module is solid-state design for serial and Serial ATA translation interface. It's an ideal replacement for standard SATA hard disk by no errors even under extreme shock and vibration conditions. The Micro Disk Serial ATA Module is extremely small and highly suitable for rugged environments, thus providing an excellent solution for space limitations. It is compatible with all consumer applications designed for data storage, allowing simple use for the end user.

The Micro Disk Serial ATA Module is Serial ATA compatible and offering various capacities. It has low power consumption and can operate from a single 3.3/5.0 Volt power supply. The operating temperature grade is commercial operating temperature grade (0°C~+70°C) and wide operating temperature grade (-40°C~+85°C).

2. System Features

- ◆ Serial ATA 1.0a Specification compliant.
 - ◆ Max Capacity supported: 16GByte.
 - ◆ High reliability assured based on the internal Error Correcting Code function.
 - ◆ Reliable wear-leveling algorithm to ensure the best of flash endurance.
 - ◆ Auto Standby and Sleep Mode supported.
 - ◆ Hardware Protect.
 - ◆ Capacity supported: 128MB, 256MB, 512MB, 1GB, 2GB, 4GB, 8GB and 16GB
-

3. Specifications

Compatibility	Serial ATA 1.0a Specification	
Flash Technology	NAND Type Flash Memory Base	
Form Factor	Horizontal Type in Rightwards	
Connector Types	Standard 7-pin female Serial ATA connector	
System Performance		
Data Transfer Mode	Serial ATA	
Sequential Read	SLC Type	45Mbytes / sec Max.
	MLC Type	45Mbytes / sec Max.
Sequential Write	SLC Type	30Mbytes / sec Max.
	MLC Type	25Mbytes / sec Max.
Access Time	0.5ms	
Environmental Specification		
Standard Temperature	Operation	0°C ~ +70°C
	Non-operation	-20°C ~ +80°C
Wide Temperature	Operation	-40°C ~ +85°C
	Non-operation	-50°C ~ +95°C
Vibration	Operation max	20 G
	Non-operation max	20 G
Humidity	5~95% non-condensing	
Shock	1500 G	
Reliability		
MTBF	> 1,000,000 hours	
Error Correction Code	4 bits Error Correction Code	
Endurance(SLC)	Greater than 1,000,000 cycles logically contributed by Wear-leveling and advanced bad sector management algorithms	
Endurance(MLC)	Greater than 1,00,000 cycles logically contributed by Wear-leveling and advanced bad sector management algorithms	
Data Reliability	< 1 non-recoverable error in 10 ¹⁴ bits read	
Data Retention	10 years	
Power Consumption		
Power Voltage	+5V ± 10%	
Read	149mA	
Write	188mA	
Sleep Mode	107mA	
Power input	A power cable with 4pin to 2pin connector	


Pin Assignments



Pin Number	Name	Type
1	GND	1st mate
2	A+	Differential signal pair A from Phy
3	A-	
4	GND	1st mate
5	B-	Differential signal pair B from Phy
6	B+	
7	GND	1st mate

Note:

1. All pins are in a single row, with a 1.27 mm (.050") pitch.
2. The comments on the mating sequence in forward table apply to the case of backplane blind mate connector only. In this case, the mating sequences are:
 - (1) The pre-charge power pins and the other ground pins
 - (2) The signal pins and the rest of the power pins.

5. Dimension

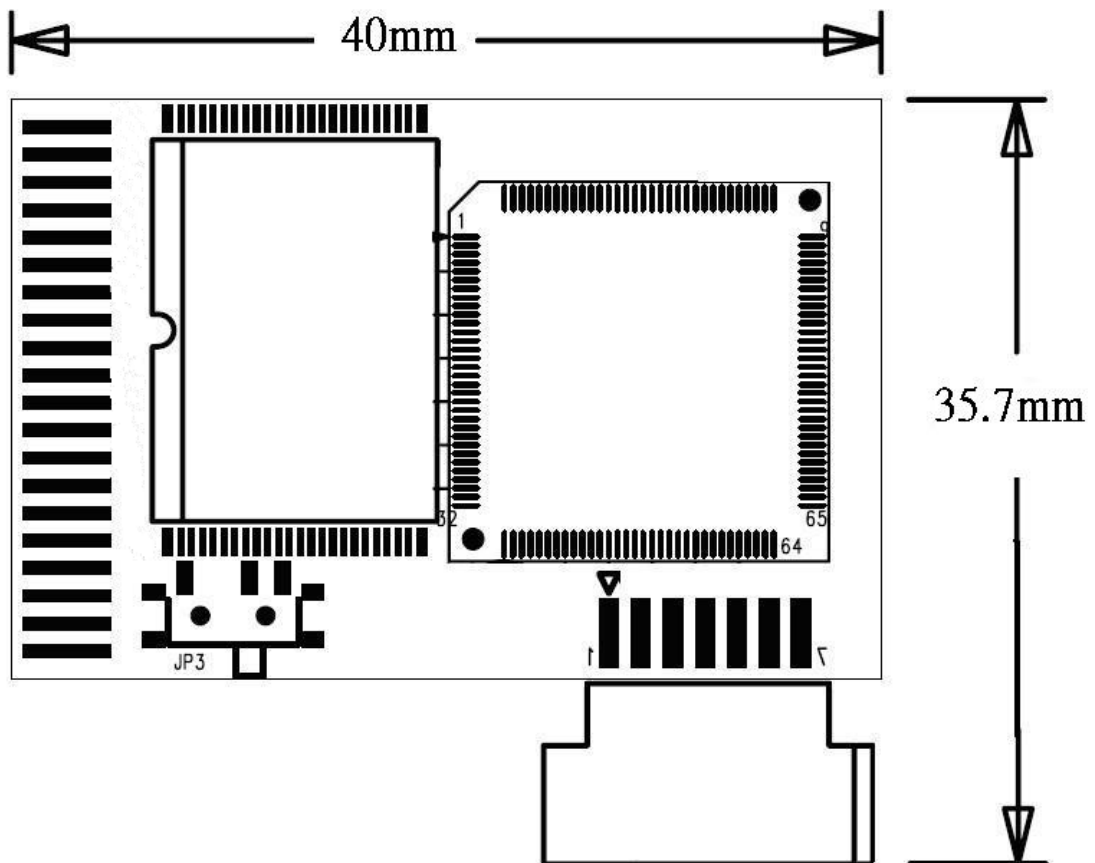

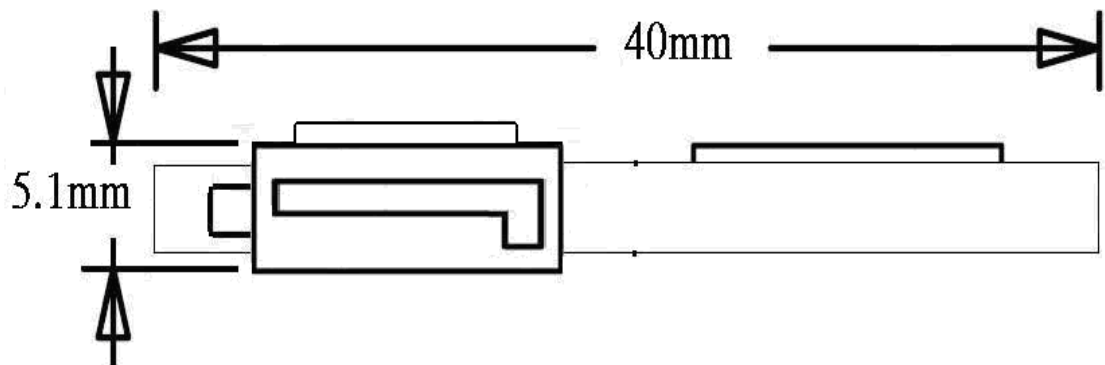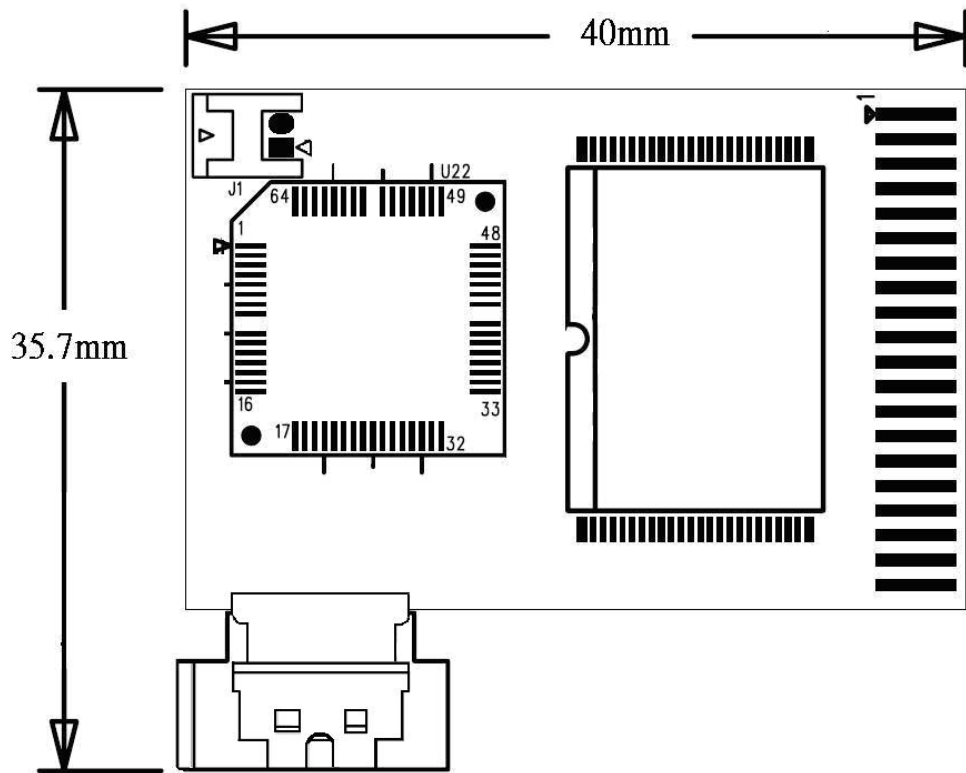

Electrical Specifications

Symbol	Parameter	Rating	Units
V_{CC}	Power Supply	-0.3 to 5.5	V
V_{IN}	Input Voltage	-0.3 to $V_{CC} + 0.3$	V
V_{OUT}	Output Voltage	-0.3 to $V_{CC} + 0.3$	V
V_{CCQ}	Power supply for host I/O and embedded regulator	-0.6 to 5.5	V
V_{IN5}	Input voltage for host I/O	-0.3 to $V_{CCQ} + 0.3$	V
V_{OUT5}	Output voltage for host I/O	-0.3 to $V_{CCQ} + 0.3$	V
T_{OPR-I}	Industrial temperature grade	-40° to +85°	°C
T_{OPR}	Commercial temperature grade	0° to +70°	°C
T_{STG}	Storage temperature	-55° to 150°	°C

6. DC Characters

Symbol	Parameter	Condition	MIN	TYP	MAX	Unit
DC sink current	I_{OL}		8			mA
Internal pull-up current			40		160	μ A
Input low-voltage	V_{IL}				0.8	V
Input high-voltage	V_{IH}		2.0		5.0	V
Output low-voltage	V_{OL}		0		0.4	V
Output high-voltage	V_{OH}		2.6		3.6	V

7. AC Characters


Symbol	Parameter	Condition	MIN	TYP	MAX	Unit
Rising slew-rate			0.4	0.7	1.0	V/ns
Falling slew-rate			0.4	0.7	1.0	V/ns
Device Capacitance	C device				27	pF

8. Hardware Function

8.1. Overview




Front View

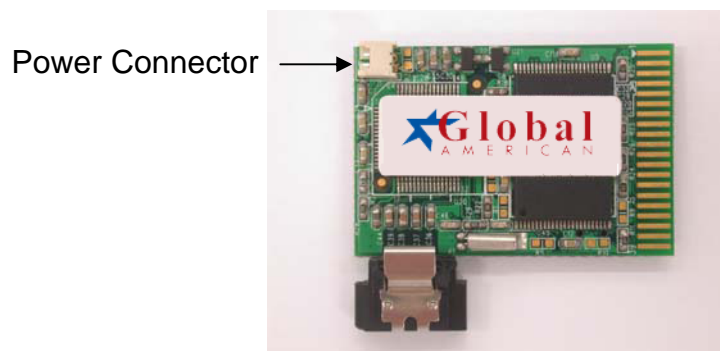


Back View

8.2. Write Protect Switch

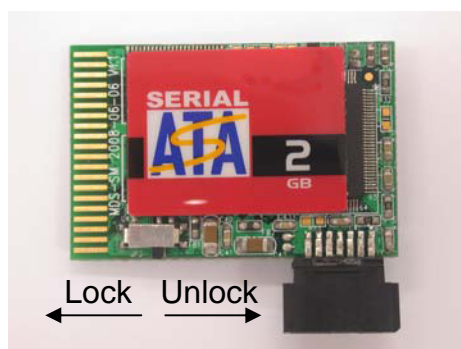

9. Packing

9.1. Product Package

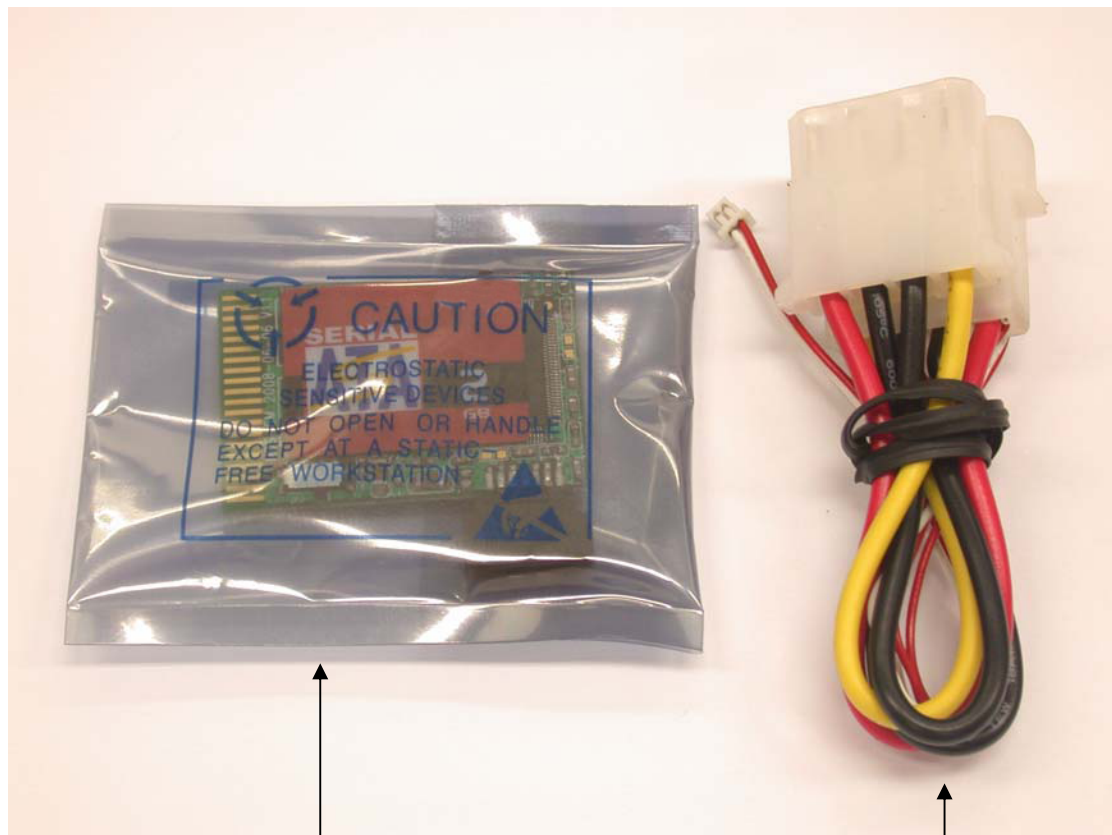

Micro Disk SATA Module

Power Cable

9.2. Product Photo

9.2.1. Front View



9.2.2. Back View

Power Connector



Any advice or comments about our products and service, or anything we can help you with please don't hesitate to contact with us. We will do our best to support your products, projects and business.



Address: Global American, Inc.
17 Hampshire Drive
Hudson, NH 03051

Telephone: Toll Free U.S. Only (800) 833-8999
(603) 886-3900

FAX: (603) 886-4545

Website: <http://www.globalamericaninc.com>

Support: Technical Support at Global American
