



User's Manual

3901160 & 3901161

Copyright

Copyright© 2002 – 2005, all rights reserved. This document is copyrighted and all rights are reserved. The information in this document is subject to change without prior notice to make improvements to the products.

This document contains proprietary information and protected by copyright. No part of this document may be reproduced, copied, or translated in any form or any means without prior written permission of the manufacturer.

All trademarks and/or registered trademarks contains in this document are property of their respective owners.

Disclaimer

The company shall not be liable for any incidental or consequential damages resulting from the performance or use of this product.

The company does not issue a warranty of any kind, express or implied, including without limitation implied warranties of merchantability or fitness for a particular purpose.

The company has the right to revise the manual or include changes in the specifications of the product described within it at any time without notice and without obligation to notify any person of such revision or changes.

Trademark

All trademarks are the property of their respective holders.

1. Product Overview

3901160 series is a Mini-PCI card for multimedia solution. This card integrated **Conexant Bt878A** video capture codec . The **Bt878A** allows for capture of teletext and other data types.

The General features of **Conexant Bt878A** are below:


1. Supports NTSC/PAL/SECAM Video decoding.
2. Supports image resolution up to 768 x 576 (full PAL resolution).
3. Supports complex clipping of video source.
4. Zero wait state PCI burst writes.
5. Field/ Frame masking supports to throttle bandwidth to target.
6. Multiple YCrCb and RGB pixel formats supported output.
7. Image size scalable down to icon using vertical & horizontal interpolation filtering.
8. Multiple composite and S-Video inputs.
9. Supports different program control for even and odd fields.
10. Supports different color space/scaling factors for even and odd fields.
11. Supports planar YUV data format.
12. Supports for mapping of video to 255 color palette.
13. VBI data capture for closed captioning teletext and Intercast data decoding.

2. Product Specification:


Form Factor	Mini-PCI Type III with 124-pin interface
3901160	
Video Codec	Conexant Bt878A
Output Function	10-pin video-in connector
Dimensions (W x D)	60mm x 45mm
Accessories	
3901160	1 x 10-pin video cable
3901161	2 x 10-pin video cable

3. Hardware setup:

3.1 Connector Location

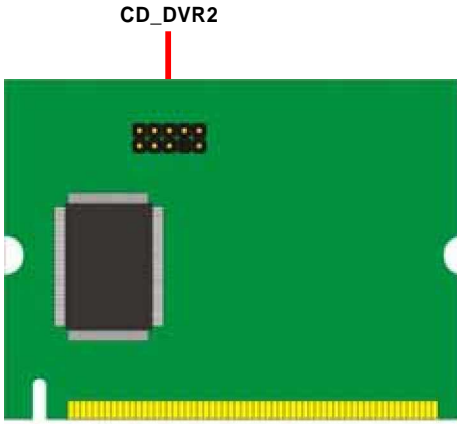


3901160

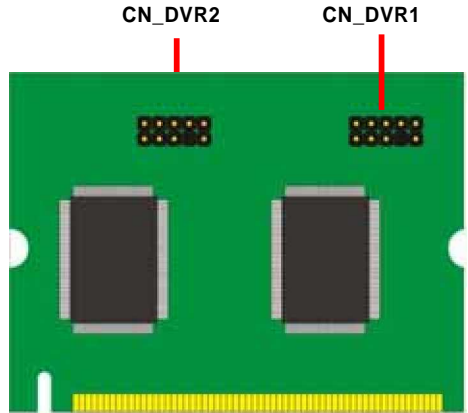


3901161

3.2 Video In (for 3901160 and 3901161)

The board's video in function can let you build a video recorder system. The CN_DVR is a 10-pin header to connect the S-Video/RCA cable in package, or you can follow the pin mapping to create a cable.

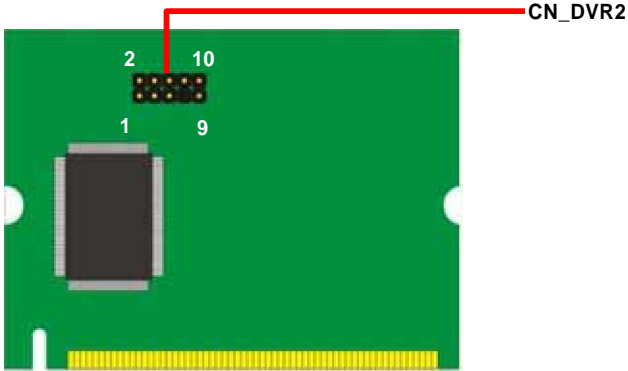

Pin Assignment	Pin Number	Pin Number	Pin Assignment
Ground	1	2	COMPVIDEO
Ground	3	4	Y
Ground	5	6	C
Ground	7	8	N/C
Ground	9	10	N/C

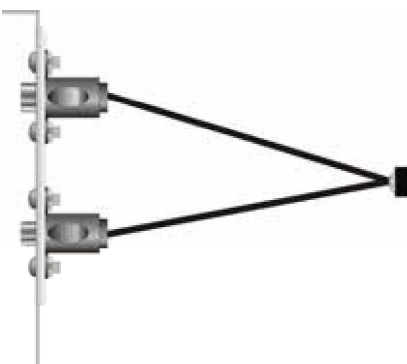

Please use this cable to connect to CN1
The pin-1 of the cable would have a white mark on the connector

Any advice or comments about our products and service, or anything we can help you with please don't hesitate to contact with us. We will do our best to support you for your products, projects and business

Global American Inc.

Address: 17 Hampshire Drive
Hudson, NH 03051

TEL: Toll Free (U.S. Only) 800-833-8999
(603)886-3900

FAX: (603)886-4545

Website: <http://www.globalamericaninc.com>

E-Mail: salesinfo@globalamericaninc.com

